

# Uputstvo za ugradnju brava i okretanje jezička


## Manual for door locks installation and latch turn

### Podesavanje visine valjka

Valjak se podešava Imbus ključem 4, rotirajući levo ili desno valjak menja dužinu

### Roller adjust

Allen key 4 - turn left and right to adjust roller length

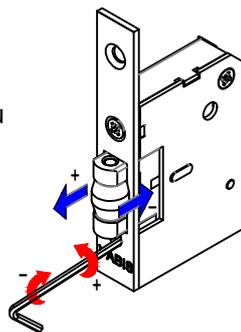


1. Make hole in the PVC profile where the lock will be placed

1. Napraviti otvor u PVC profilu u koji ćete kasnije namontirati bravu



4. Put the screw in the hole to hitch door lock

4. Pričvrstiti bravu za profil vijkom

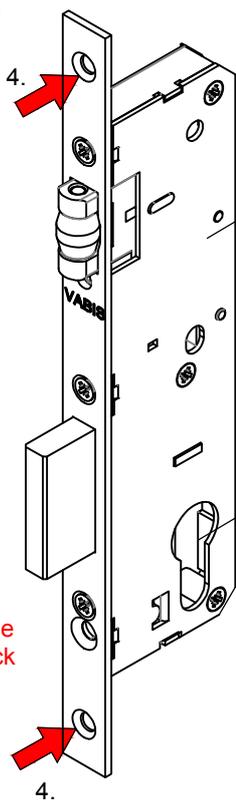

4. Put the screw in the hole to hitch door lock

4. Pričvrstiti bravu za profil vijkom

4.

3. Bravu postaviti u otvoru koji je napravljen na profilu

3. Place door lock in the hole you make in the profile



2. On the another side of the profile make the hole on dimension Y

2. Na bočnoj strani profila napraviti naznačen otvor koji se radi u zavisnosti od širine brave Y

X=85 ; 181 mm

X=92 ; 189 mm

